






PROADAS is the universal modular system developed for check and **calibration of driver** assistance systems (front sensors), check of the alignment status and complete wheel alignment service (optional) on multi-brand vehicles and commercial vehicles.



- Quick, accurate and user-friendly
- **Compliant** with the procedures of vehicle manufacturers
- Meets the needs of:
 - mechanical workshops,
 - body shops,

6

- car glass repairers,
- wheel specialists

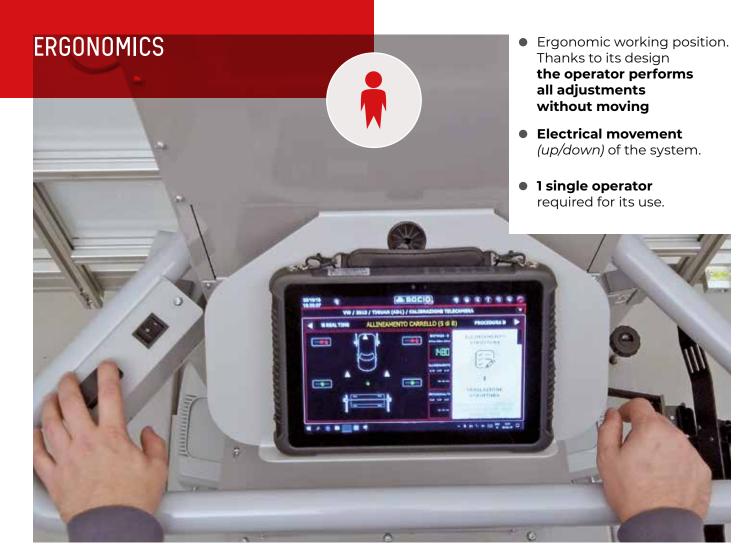



Maximum precision and accuracy thanks to the integrated technology, CCD sensors and contactless distance sensors

PRECISION



• Immediate system positioning thanks to the information communicated in real time by the integrated wireless devices (PATENT PENDING).


• Error-proof.

The software contains the preloaded positioning values. It displays the point where it is and **guides** the system



ACCURATE ADJUSTMENT





Operator immediately productive!

Simplified procedures within the software guide the operator step by step in the alignment and calibration of the ADAS REPARAZIONE VEICOLO (3 di 8) system

PROCEDURA

AZIONE TELECAN

WI JOINT LEIS I W

POSIZIONARE SUPPORTO RUOTE ANTERIORI

PLUG & PLAY

WHEEL ALIGNMENT CHECK



+00.01°

1026

+01.170

00.25 01.00

+00.50-

+00.05

00.000

+00.10-

Front Axle

+00.01°

+01.92

- Using the **CCD sensors** it is possible to check the alignment status of the vehicle
- It is possible to convert the PROADAS into a complete wheel alignment service station. (Optional)

COMPLETE WHEEL

-00.01°

+01.17

+01.920

+02.67

-00.25

01.00.

+00.05-


+00.10-

00.00°

00.000

-00.010

+00.50

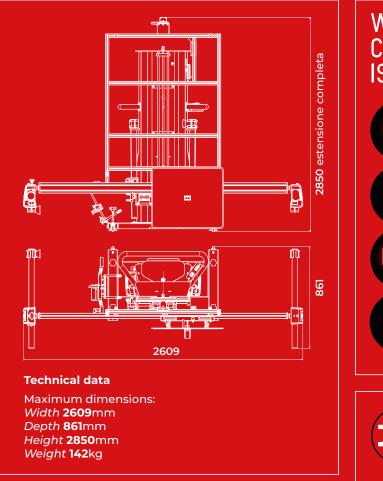



- Incoming vehicle statusPROADAS
 - positioning registration
- Outgoing vehicle status
- Wheel alignment check
- Wheel alignment registration (optional)





Compatibility with **vehicles positioned on lift** or another structure, the software compensates the offset of the levelled surface on which the vehicle is placed

Compatibility with CCD wheel aligners manufactured by Teco (check year of manufacture and model); after completing the vehicle alignment it is possible to perform an ADAS calibration by launching the calibration software procedure and aligning the system using the CCD sensors of the wheel aligner and the wireless distance sensors



WE CALIBRATE SAFETY



